



SITUATION PLAN

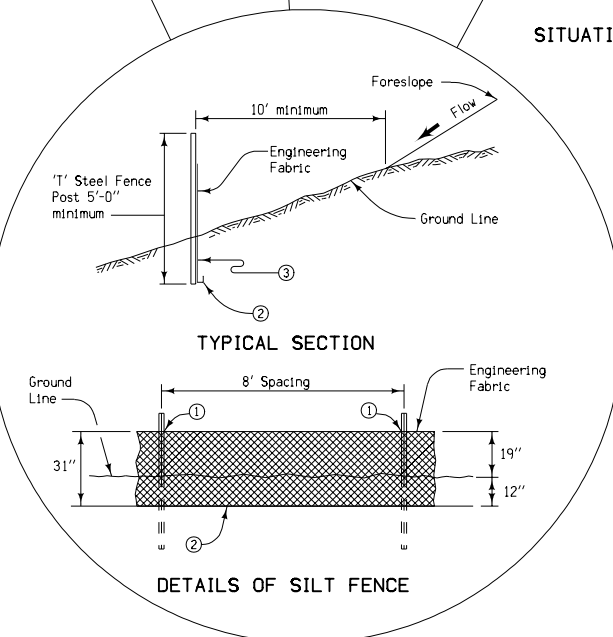


TYPICAL SECTION

DETAILS OF SILT FENCE

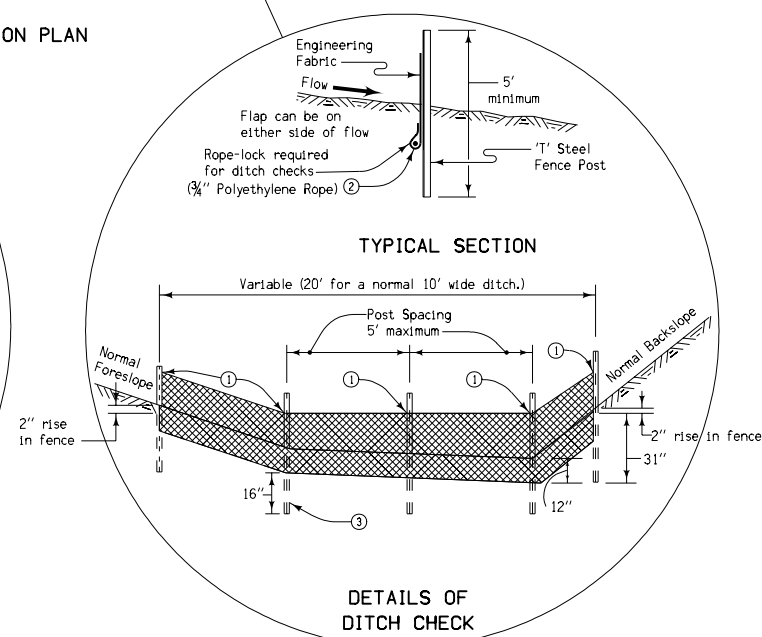

TYPICAL SECTION

DETAILS OF DITCH CHECK



BACK VIEW
ATTACHMENT TO POST

GENERAL NOTES:

All compaction shall be accomplished by driving over each side of silt fence two to four times with device exerting 60 p.s.i. or greater.

Contract Items:

- Silt Fence
- Silt Fence for Ditch Checks

- ① Secure top of Engineering Fabric to Steel Posts, using cable ties (50 lb.) or wire. See details of attachment to post.
- ② Engineering Fabric to be folded along the bottom.
- ③ Steel Posts to be embedded 28 inches. The steel post nearest the pavement shall be embedded 39 inches.

STANDARD ROAD PLAN RC-16A	
REVISION: Dimension 20' segment skewed toward foreslope.	REVISION NO. 1
APPROVED BY DESIGN METHODS ENGINEER <i>William J. Stein</i>	REVISION DATE 04-20-04
EROSION CONTROL DETAILS FOR SILT FENCE (ENGINEERING FABRIC-MACHINE INSTALLATION)	